



LH HIGH-EFFICIENCY SERIES

22-75 kW

7.6/8.6/10.6/12 bar(g)

**High-Efficiency Stationary Oil Flooded
Screw Air Compressor**



ABOUT SULLAIR

Since 1965, Sullair has been leading innovation in the field of screw compression and vacuum technology. With more than 50 years of experience, we have made a new round of innovation in this field. Sullair adopts the most advanced technology, equipment and production processes to provide customers with the best air compressors and vacuum equipment to meet the most demanding requirements of customers. Sullair has a first-class screw rotor design, which leads the industry trend in this field.



RELIABILITY

Customers who work with Sullair have found that the intangibles make all the difference — things like trust, confidence and peace of mind. They go to work every day having full faith in their equipment, as well as the knowledge that dedicated distributors and Sullair personnel have their back every step of the way.

DURABILITY

Bulletproof. Built to last. However you spin it, Sullair compressors are in it for the long haul, driven by the design of the legendary Air End. In factories and on jobsites all over the world, you will find Sullair compressors standing the test of time, running consistently today like they did on day one.

HIGH PERFORMANCE

Sullair is constantly innovating to improve the performance of our compressors. For our portable line, this means longer run-time at the jobsite. For our stationary compressors, this means more energy efficiency. With energy costs often far exceeding the upfront cost of a compressor, Sullair is committed to helping you manage your operating expenses — for as long as they run!



KEY PRODUCT FEATURES AND INDICATORS THAT BRING YOU BETTER PERFORMANCE



1. Electronic Control System

- The electronic control system from International brand - Schneider Electric with high reliability.
- The controller offer standard English and Chinese language, with temperature and pressure display in real time and alarm function.

2. Air End

- Sullair patented Air End designed, engineered and manufactured in the USA.
- Large rotor, low speed design, low noise, high reliability and durability.
- Proven reliable bearing design to extend bearing life (up to 100,000 hours) and reduce on maintenance cost.
- 5 years warranty will be provided for the screw Air End.
- The exclusive Sullair Diamond Warranty for 10 years on Air Ends are optional.(With using 24KT Compressor Fluid.)

You can choose the exclusive Sullair Air End with 10 Years Diamond Warranty.



Maintaining the Sullair 10-Year Diamond Warranty requires using Genuine Sullair parts and 24KT® Compressor Fluid. Restrictions apply.

3. Transmission System

Transmission System has a robust design of the gear plus coupling. The use of the coupling increase the operational reliability of the transmission system, avoids the large radial force and axial force brought by the helical gear transmission, protects the motor bearing and compressor bearing. This will significantly prolongs the life span of the transmission system.

4. Filtration System

- Sullair OptimaAir® Air Filter provide 99.9% efficiency per ISO5011, cleaner air intake and extend component life.
- Large capacity fluid/air tank, optimize the efficiency of pre separation, so as to improve the actual service life of fluid separator.
- Dual nested Optimizer™ separator elements (45-55 kW), reduce fluid carryover to a maximum of 2 ppm and extend service life up to 8,000 hours (under normal operating circumstance).

5. Fluid Piping System

- Optimized fluid piping system with reduce pressure drop.
- The LH Series are package with Sullube®, that can provide excellent performance. Even at high temperature there is no coking, 8,000 hours operation life, it helps customer to reduce maintenance cost.

6. Cooling System

- LH Series installed with centrifugal fan provide high efficiency and lower noise.
- With large area cover by fluid cooler. The centrifugal fan can provide large surplus cooling, even working on the worst condition.


7. Motor

- LH Series offered with IP55 enclosed high efficiency motor (for fixed speed).
- Offer with IE3 high efficiency.
- Heavy duty designed low speed motors, which have longer bearing life than high speed motors.
- WEG is standard motor for 50 Hz.
- Class F insulation (Class B raise) B raise motor allow more then 50% life time vs F raise.

SULLAIR LH HIGH-EFFICIENCY SERIES ROTARY SCREW COMPRESSORS

- LH Series comes with Sullair's patented high efficiency rotary screw Air End, which improves the energy efficiency, provide strong durability and high reliability. We provide 5 years warranty with Sullair Air End.
- The LH Series has 10% higher capacity than the market supplier.
- The LH Series package with IP55 IE3 motor as standard, that can bring energy efficiency and the cost saving to our customer.
- LH Series are low noise designed, due to the unit is equipped with a centrifugal fan as a standard configuration, which not only provides a surplus cooling air flow, but also reduced the noise level by 2-3dB of the whole machine.
- LH Series 22-75 kW supplied with two stage fluid separation system with special filter material and equipped with large capacity oil-air tank, further optimizing its separation capacity and reducing the oil carry over (Less than 2ppm).
- The full range LH Series are equipped with Sullube, even at high temperature there is no coking, 8,000 hours operation life, it helps customer to reduce maintenance cost.

ELECTRONIC SPIRAL VALVE (OPTIONAL ONLY FOR LH75)

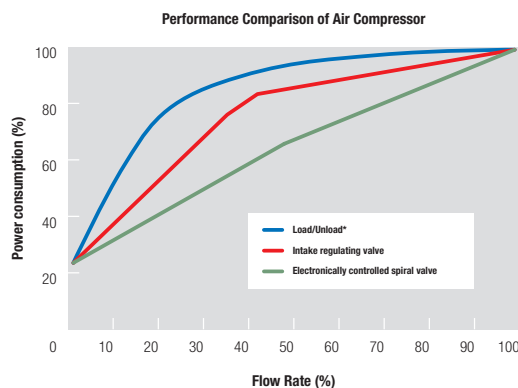


The main cost to operate an air compressor - is energy costs. The saving of the energy cost can recover from the initial air compressor investment. Effectively matching compressor production capacity with spiral valves to facilitate your needs and also the best way to save both energy and money.


Sullair Spiral Valve Benefits

- Compressor with electronic spiral valve feature a variable displacement Air End. Compression volume is varied to suit air demand by progressively opening or closing internal bypass ports on the Air End. And compression chamber Closed bypass ports utilize the entire length of the rotor.
- Capacity is matched to system demand - prevent the wastage of air.
- Up to 55% turndown capability with electronic spiral valve.
- As compared to other compressors using suction throttling, or load/no load control, power saving up to 10% at part load conditions.


The spiral valve is closed and the air volume is compressed by 100%



The spiral valve is partially opened, the effective compression length of the rotor is reduced, and only a part of the intake air volume is compressed - the energy consumption is reduced



The spiral valve is fully opened, further reducing the effective compression length of the rotor, and the minimum amount of intake air is compressed - the energy consumption is further reduced



SULLAIR GENUINE PARTS AND LUBRICANTS


AIR TREATMENT AND OTHER VALUE ADDED SERVICE

SULLAIR WILL ASSIST IN OPTIMIZING YOUR OPERATION

With Sullair what you get is more than a Air Compressor. You are also getting the world's leading rotary screw technology and global service. We provide you with quality after sales products and top service.

If you have any needs, please contact the distributors supporting your region or Sullair after market support team.

Complete Air Compressor Package

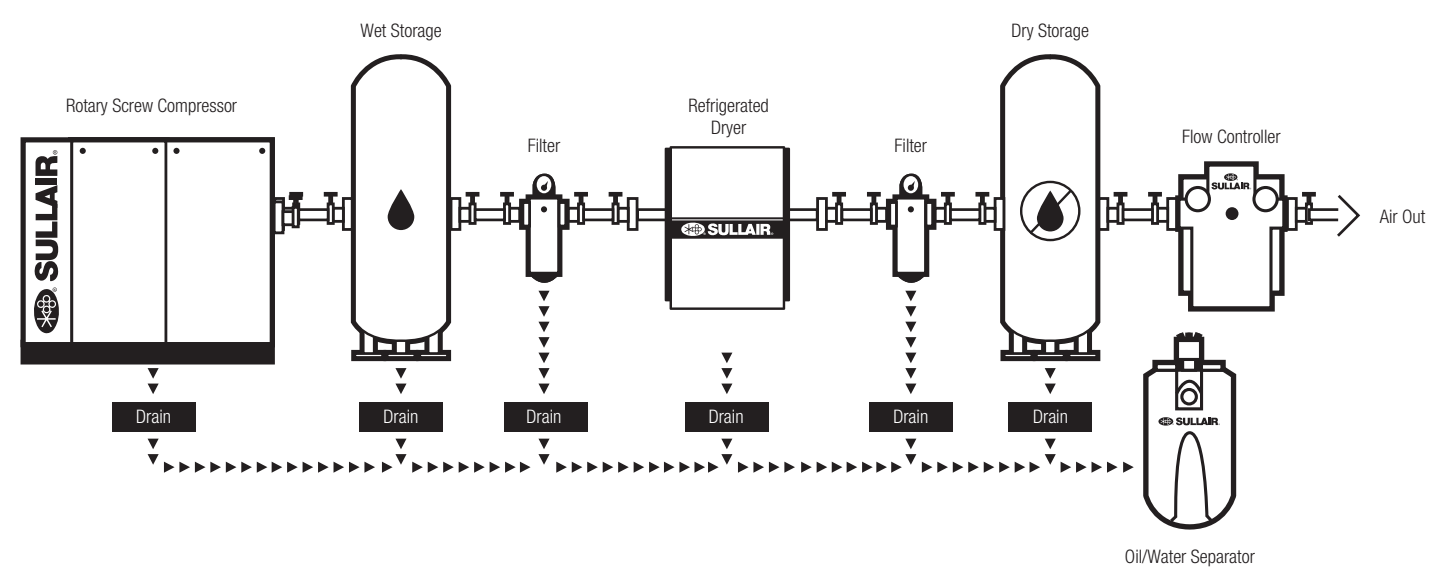

Options

	Standard	Option
Air filter	99% high precision air filter	—
Flow control	Intake regulating valve capacity control	—
Fluid	8,000 hours Sullube+ 5 years warranty for the airend	24KT maintenance-free fluid + 10 years for airend food-grade fluid (please contact the agents or Sullair's after-sales service department)
Motor	IE3 TEFC	IE3 TEFC+Motor space heater
Cooling System	0-46 °C design temperature model (air-cooled / water-cooled)	55 °C high temperature model (air-cooled only)
Other (Optional Accessories)	Please contact your Sullair distributor or Sullair sales people. Our company will serve you wholeheartedly.	

PRODUCT INFORMATION AND TECHNICAL PARAMETERS

For more information, please contact Sullair distributors in your area.

Technical parameters (50 Hz)

Compressor model	Motor power kW/HP	Cooling mode	Rated voltage / frequency V/Hz	Maximum pressure bar(g)	Air discharge m ³ /min	Unit weight kg	Unit size L*W*H mm	Air Discharge size	Noise @1 meter
LH-22	22/30	Air-cooled	380-415 V/50 Hz	7.6	4.2	1,050	1,600×860×1,450	Rc1 1/2	71
				8.6	4.0				
				10.6	3.7				
				12	3.3				
LH-30	30/40	Air-cooled	380-415 V/50 Hz	7.6	5.9	1,150	1,600×860×1,450	Rc1 1/2	73
				8.6	5.6				
				10.6	4.9				
				12	4.2				
LH-37	37/50	Air-cooled	380-415 V/50 Hz	7.6	6.9	1,150	1,600×860×1,450	Rc1 1/2	75
				8.6	6.4				
				10.6	5.9				
				12	5.1				
LH-45	45/60	Air-cooled	380-415 V/50 Hz	7.6	8.6	1,420	2,150×1,200×1,730	Rc2	72
				8.6	7.9				
				10.6	7.0				
				12	5.7				
LH-55	55/75	Air-cooled or water-cooled	380-415 V/50 Hz	7.6	11.2	1,680	2,150×1,200×1,730	Rc2	73
				8.6	10.0				
				10.6	8.6				
				12	7.6				
LH-75	75/100	Air-cooled or water-cooled	380-415 V/50 Hz	7.6	15.0	2,100	2,500×1,500×2,016	Rc2	71
				8.6	14.0				
				10.6	12.4				
				12	10.8				

Technical parameters (60 Hz)

Compressor model	Motor power kW/HP	Cooling mode	Rated voltage / frequency V/Hz	Maximum pressure bar(g)	Air discharge m ³ /min	Unit weight kg	Unit size L*W*H mm	Air Discharge size	Noise @1 meter
LH-22	22/30	Air-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	4.0	1,050	1,600×860×1,450	Rc1 1/2	71
				8.6	3.7				
				10.6	3.5				
				—	—				
LH-30	30/40	Air-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	5.8	1,100	1,600×860×1,450	Rc1 1/2	73
				8.6	5.4				
				10.6	4.8				
				12.6	4.0				
LH-37	37/50	Air-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	6.6	1,150	1,600×860×1,450	Rc1 1/2	75
				8.6	6.3				
				10.6	5.6				
				12.6	5.0				
LH-45	45/60	Air-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	8.5	1,420	2,150×1,200×1,730	Rc2	72
				8.6	7.9				
				10.6	6.6				
				12.6	—				
LH-55	55/75	Air-cooled or water-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	11.2	1,680	2,150×1,200×1,730	Rc2	73
				8.6	10.0				
				10.6	8.2				
				12.6	7.7				
LH-75	75/100	Air-cooled or water-cooled	220-240 V/60 Hz 380-420 V/60 Hz	7.6	15.1	2,100	2,500×1,500×2,016	Rc2	71
				8.6	14.0				
				10.6	12.0				
				12.6	10.8				

- Unit performance parameters and acceptance criteria shall be subject to Appendix C, ISO 1217
- Reference conditions: absolute intake pressure: 1 bar; air intake temperature: 20 °C; relative humidity: 0%
- The air discharge measured at the following working pressures is: 7 bar for the 7.6bar model; 8 bar for the 8.6bar model; 10 bar for the 10.6bar model; and 12 bar for the 12.0bar model
- Noise value deviation: ±3

SULLAIR ASIA PTE LTD

Add: 30 Pioneer Crescent, #10-15,
West Park BizCentral, Singapore 628560
Tel: +65 6305 7442
SEA.enquiry@sullair.com

SULLAIR.COM   



All rights reserved. Specifications subject to change without notice.
The Sullair symbol, Sullair wordmark, Optimalair®, AirLinx®, and Sullube® are registered trademarks of Sullair, LLC.